


MECHANICAL SPLICE FLEMISH EYE SLINGS				2 LEG BRIDLE					
		VERTICAL 	CHOKER 	VERTICAL BASKET 		30 DEGREE 	45 DEGREE 	60 DEGREE 	
ROPE DIAMETER (INCHES)	1/4	0.56	0.41	1.1	ROPE DIAMETER (INCHES)	1/4	0.56	0.79	0.97
	5/16	0.87	0.64	1.7		5/16	0.87	1.2	1.5
	3/8	1.2	0.92	2.5		3/8	1.2	1.8	2.2
	7/16	1.7	1.2	3.4		7/16	1.7	2.4	2.9
	1/2	2.2	1.6	4.4		1/2	2.2	3.1	3.8
	9/16	2.8	2.0	5.5		9/16	2.8	3.9	4.8
	5/8	3.4	2.5	6.8		5/8	3.4	4.8	5.9
	3/4	4.9	3.6	9.7		3/4	4.9	6.9	8.4
7/8	6.6	4.8	13	7/8	6.6	9.3	11		
1	8.5	6.3	17	1	8.5	12	15		
3 LEG BRIDLE				4 LEG BRIDLE					
		30 DEGREE 	45 DEGREE 	60 DEGREE 		30 DEGREE 	45 DEGREE 	60 DEGREE 	
ROPE DIAMETER (INCHES)	1/4	0.84	1.2	1.5	ROPE DIAMETER (INCHES)	1/4	1.1	1.6	1.9
	5/16	1.3	1.8	2.3		5/16	1.7	2.5	3.0
	3/8	1.9	2.6	3.2		3/8	2.5	3.5	4.3
	7/16	2.5	3.6	4.4		7/16	3.4	4.8	5.9
	1/2	3.3	4.6	5.7		1/2	4.4	6.2	7.6
	9/16	4.1	5.8	7.2		9/16	5.5	7.8	9.5
	5/8	5.1	7.2	8.8		5/8	6.8	9.6	12
	3/4	7.3	10	13		3/4	9.7	14	17
7/8	9.9	14	17	7/8	13	19	23		
1	13	18	22	1	17	24	30		

RATED CAPACITY IN TONS

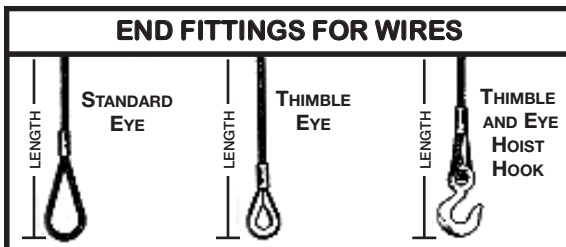

RATED CAPACITIES BASKET HITCH BASED ON D/d RATIO OF 25.

RATED CAPACITIES BASED ON PIN DIAMETER NO LARGER THAN NATURAL EYE WIDTH OR LESS THAN THE NOMINAL SLING DIAMETER.

RATED CAPACITIES BASED ON DESIGN FACTOR OF 5.

HORIZONTAL SLING ANGLES LESS THAN 30 DEGREES SHALL NOT BE USED.

RATED CAPACITIES SHOWN APPLY ONLY TO 6" x 19" AND 6" x 37" CLASSIFICATION WIRE ROPE.

F.O.B. WAREHOUSE

NYLON & POLYESTER WEBBING SLINGS • JACOB & SOLAS LADDERS • MANILA & SYNTHETIC ROPE & SPLICING • CARGO & SAFETY NETS
POLYESTER ROUND SLINGS • DIRT SLINGS • TIEDOWN STRAPS & EQUIPMENT • MARINE & INDUSTRIAL RIGGING EQUIPMENT